



Technical features

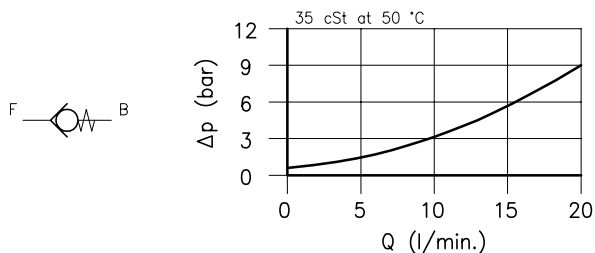

Cavity	(For dimensions see underlying space)	M 14x1.5
Nominal flow	(l/min.)	18
Max. pressure	(bar)	350
Cracking pressure	(bar)	1
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	0.010
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Buna N		

Dimensions

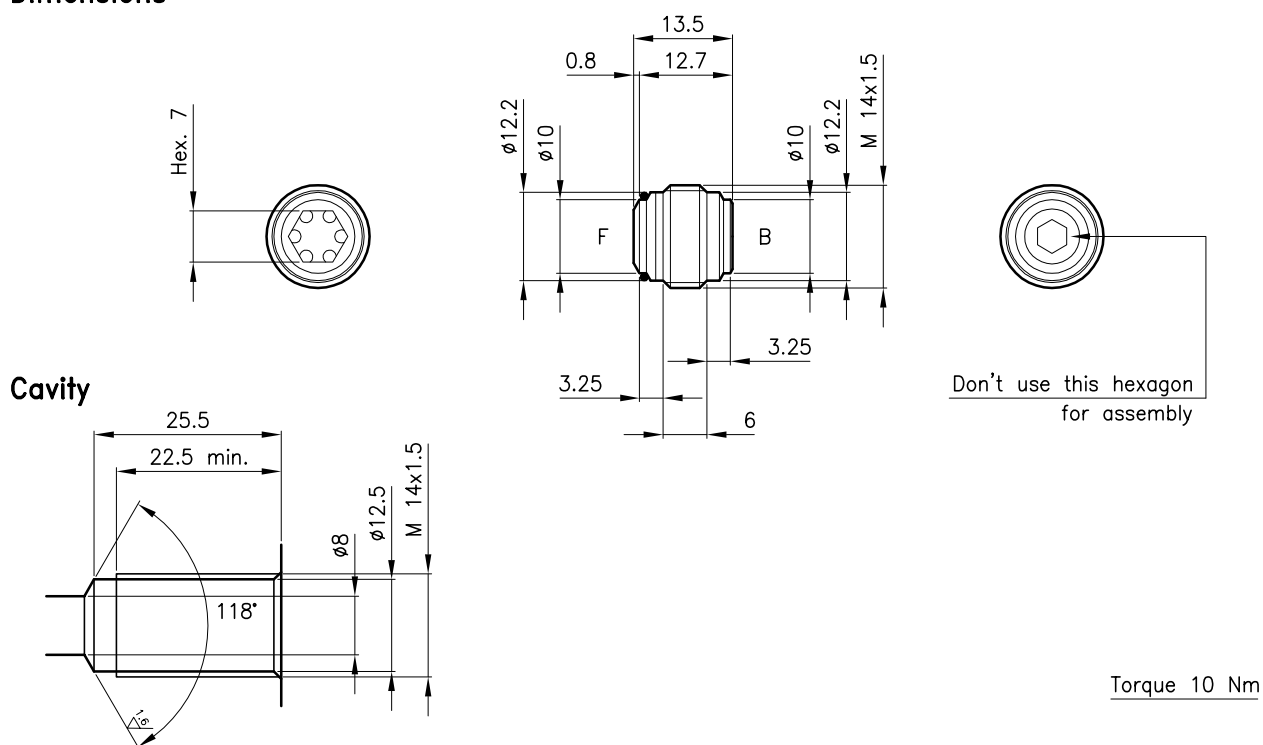

Ordering informations

CB 20/D05-P

CB 20 = Valve type



D05 = M 14x1.5

Standard spring

P = 1 bar

Codes:

CB 20/D05-P 27 011 100

External O-Ring 90 607 107