

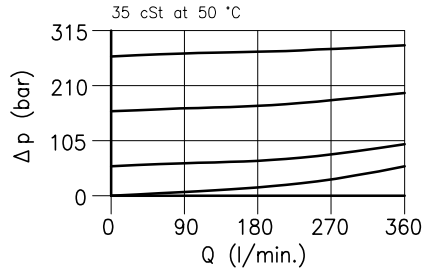


Technical features



Cavity (For dimensions see catalogue 17.000)	S 70/2
Max. flow (l/min.)	360
Max. inlet pressure (bar)	350
Max. pressure on line 2 (bar)	350
Fluid viscosity range (cSt)	2.8 – 380
Fluid temperature range (°C)	-20 +80
Mass (kg)	1.100
Cracking pressure 95% of setting value	
Reseat pressure 75% of setting value	
Cracking pressure defined with 1 l/min.	
Standard setting obtained with 10 l/min.	
Hydraulic fluid; mineral oil HM and HV ISO 6074	
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)	
Standard seals in Polyurethane and Buna N	

Dimensions

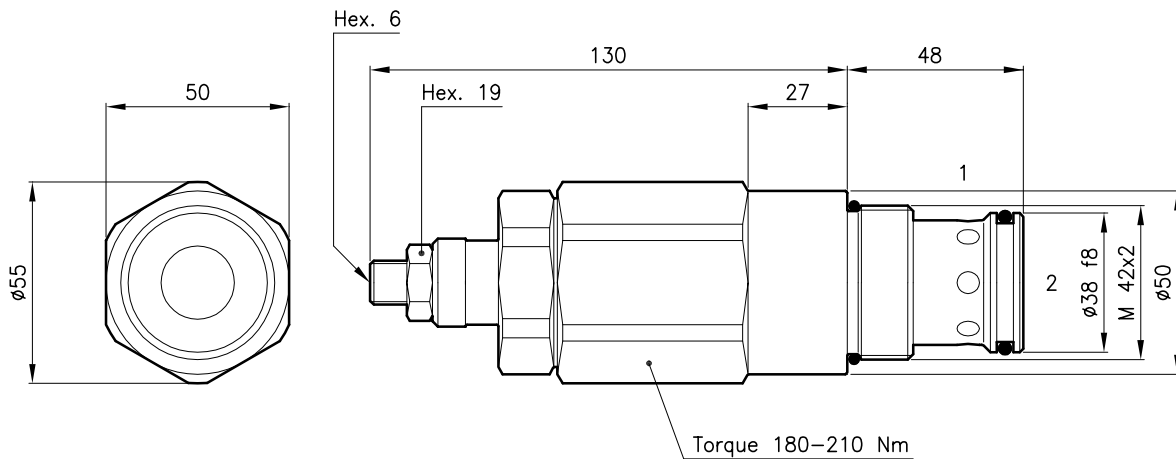

Ordering informations

LPB 70/D-N

LPB 70 = Valve type



Standard springs

Type	Setting range	Factory set
U	= 10 – 105 bar	70 bar
D	= 70 – 210 bar	140 bar
T	= 140 – 350 bar	280 bar

Adjustment type

N = Standard adjustment



Codes:

LPB 70/U-N	71 011 118
LPB 70/D-N	71 011 119
LPB 70/T-N	71 011 120

External seals kit 90 620 106

LPB 70 valves can be assembled on standard bodies 70-LO series; for dimensions see catalogue 16.010