

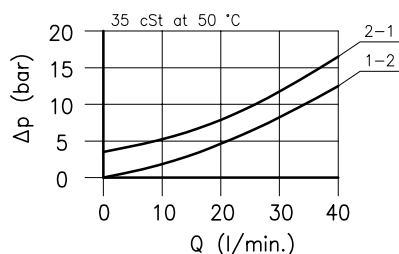



Technical features



Cavity	(For dimensions see catalogue 17.000)	S 30/3
Nominal flow	(l/min.)	30
Max. pressure	(bar)	210
Pilot ratio		2.5:1
Pilot volume	(cm ³)	0.10
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.110
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		


Dimensions

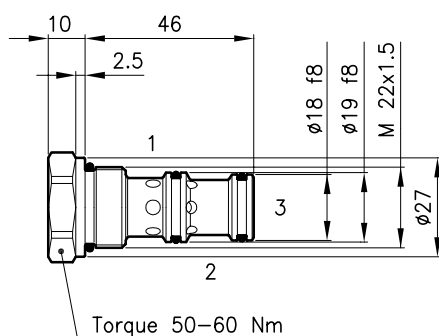

Ordering informations

CAT 30/M-S

CAT 30 = Valve type



Standard spring

M = 3.5 bar

S = Without O-Ring on the pilot piston
(Omit in Standard version)

Codes:

CAT 30/M	32 011 124
CAT 30/M-S	32 011 125
External seals kit	90 620 104

CAT 30 valves can be assembled on standard bodies 30-C3 series; for dimensions see catalogue 16.010