


- For in-line mounting of hydraulic valves
- Parallel connection of ports P and T
- 1 ... 6 sections possible
- Stud bolts for vertical stacking assemblies - see data sheet HA 0020
- Installation dimensions size 04 to ISO 4401 CETOP - RP 121H

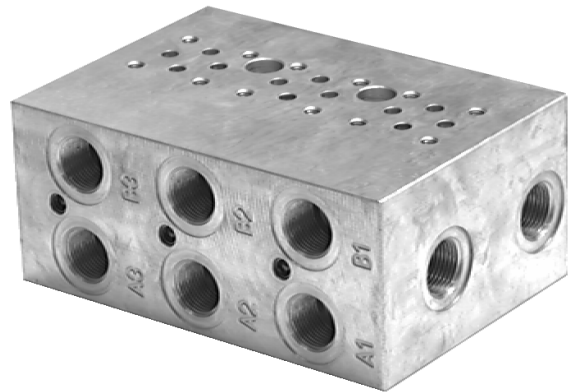

Ordering Code


PD04A - AL

In-line connecting plate

Material - aluminium

Nominal size

Connection
Functional symbol



Number of sections

- 1
- 2
- 3
- 4
- 5
- 6

- 1 section
- 2 sections
- 3 sections
- 4 sections
- 5 sections
- 6 sections

Survey of types


Type	Ordering number	Weight
PD04A1-AL	760-0121	1.319 lbs (0.60 kg)
PD04A2-AL	760-0122	2.690 lbs (1.22 kg)
PD04A3-AL	760-0123	3.880 lbs (1.76 kg)
PD04A4-AL	760-0124	5.071 lbs (2.30 kg)
PD04A5-AL	760-0125	6.305 lbs (2.86 kg)
PD04A6-AL	760-0126	7.495 lbs (3.40 kg)

FOR PREFERRED TYPES SEE BOLD TYPING IN ORDERING CODE
AND TABLE OF SURVEY OF TYPES



Valve Dimensions

Dimensions in inches and millimeters (in brackets)

Plates with 1 section

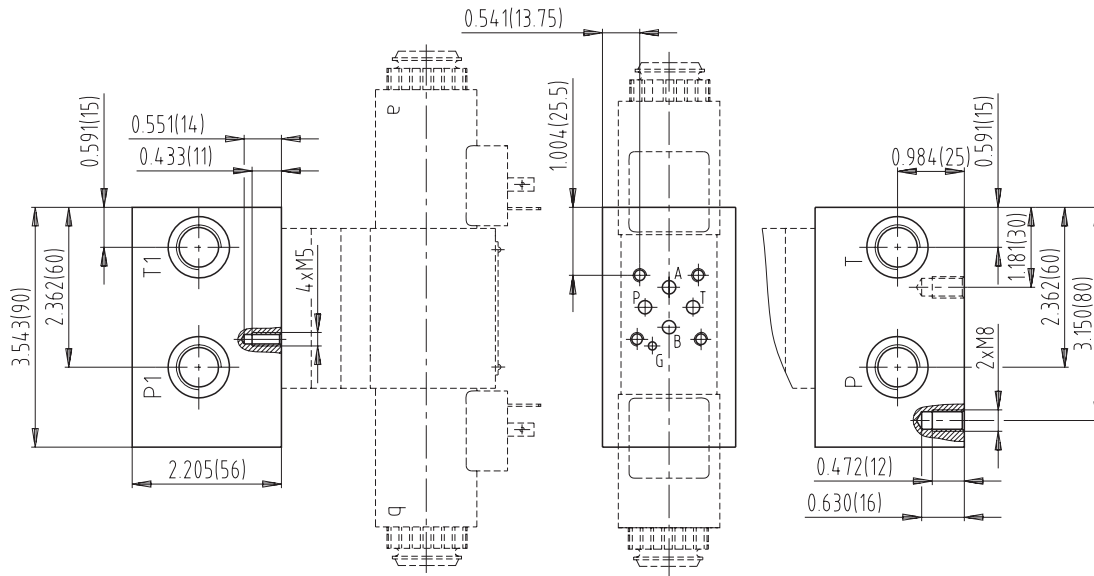

Installation dimensions

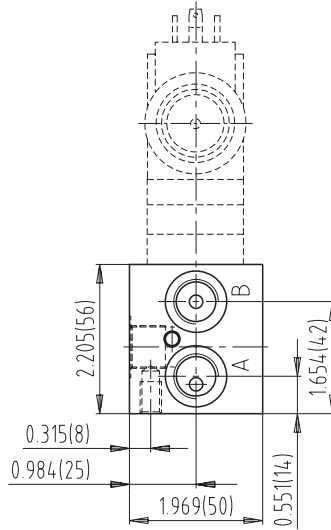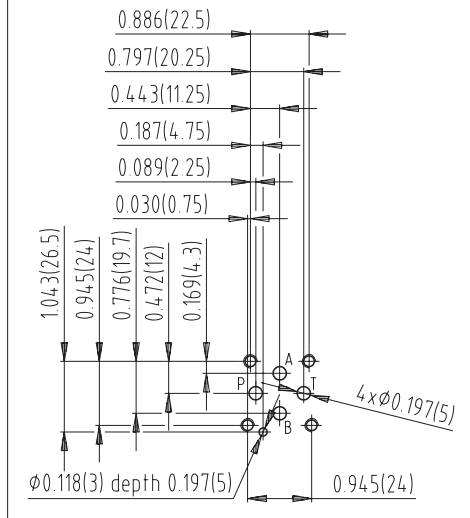


Port	A	B	T	P	T1	P1
Thread	G3/8	G3/8	G3/8	G3/8	G3/8	G3/8
Depth of thread	0.473 (12)	0.473 (12)	0.512 (13)	0.512 (13)	0.512 (13)	0.512 (13)
Counterbore	$\phi 0.945$ (24)	$\phi 0.945$ (24)	$\phi 0.945$ (24)	$\phi 0.945$ (24)	$\phi 0.945$ (24)	$\phi 0.945$ (24)
Depth of counterbore	0.020 (0.5)	0.020 (0.5)	0.020 (0.5)	0.020 (0.5)	0.020 (0.5)	0.020 (0.5)

Valve Dimensions

Dimensions in inches and millimeters (in brackets)

Plates with 2 ... 6 sections

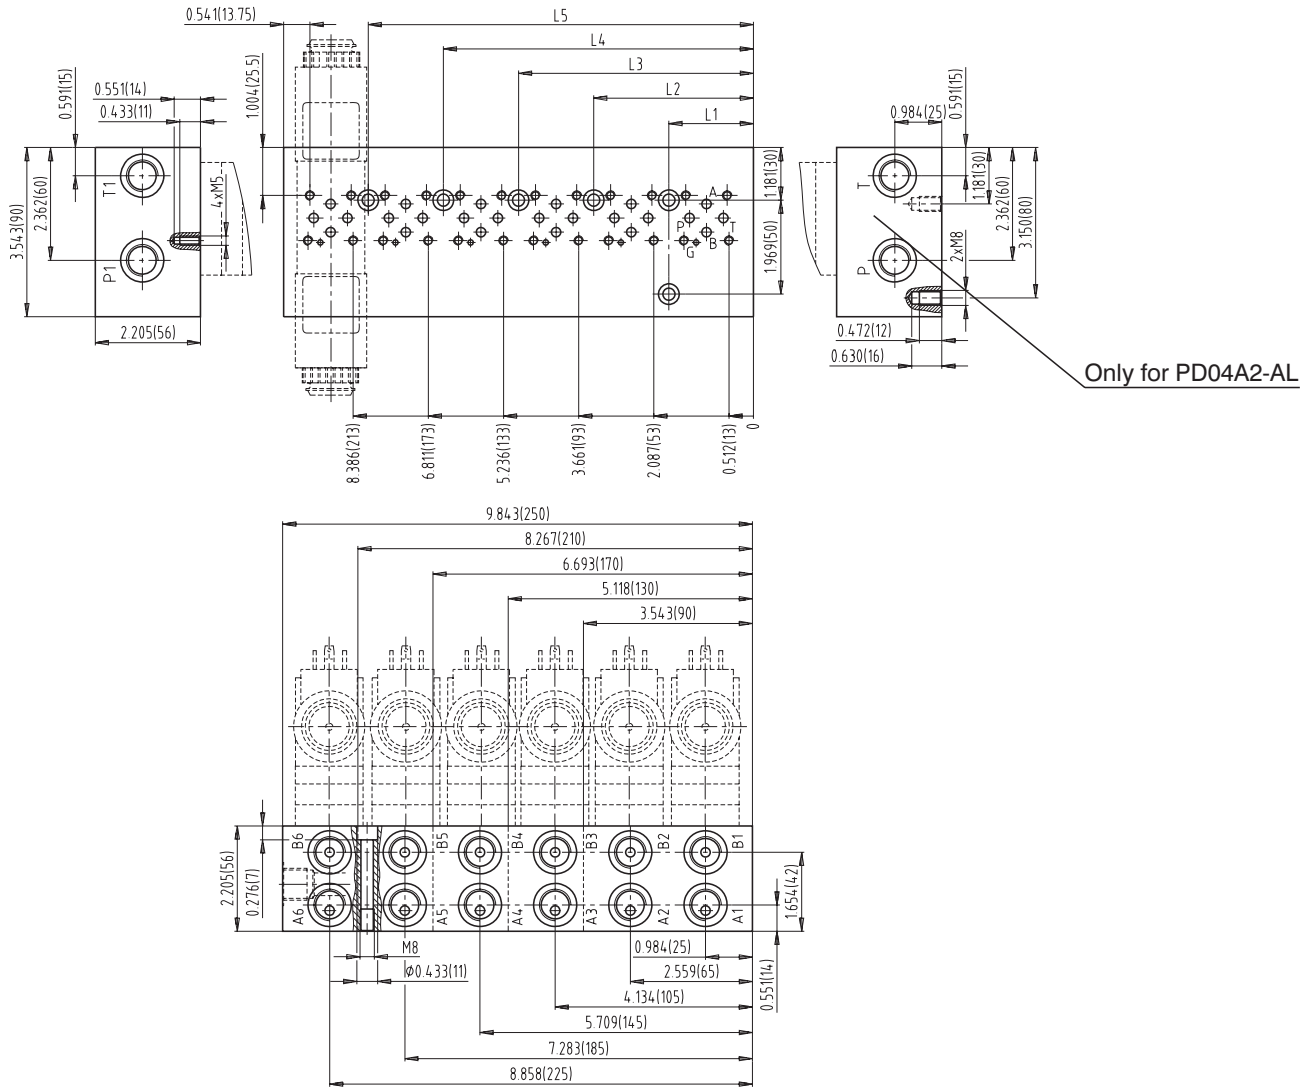

Port	A1 ... A6	B1 ... B6	T	P	T1	P1
Thread	G3/8	G3/8	G3/8	G3/8	G3/8	G3/8
Depth of thread	0.473 (12)	0.473 (12)	0.512 (13)	0.512 (13)	0.512 (13)	0.512 (13)
Counterbore	Ø0.945 (24)	Ø0.945 (24)	Ø0.945 (24)	Ø0.945 (24)	Ø0.945 (24)	Ø0.945 (24)
Depth of counterbore	0.020 (0.5)	0.020 (0.5)	0.020 (0.5)	0.020 (0.5)	0.020 (0.5)	0.020 (0.5)
	L1	L2	L3	L4	L5	
PD04A2-AL	1.772 (45)	-	-	-	-	
PD04A3-AL	1.772 (45)	3.347 (85)	-	-	-	
PD04A4-AL	1.772 (45)	-	4.921 (125)	-	-	
PD04A5-AL	1.772 (45)	-	-	6.946 (165)	-	
PD04A6-AL	1.772 (45)	-	4.921 (125)	-	8.071 (205)	

Caution

- The packing foil is recyclable.
- The technical information regarding the product presented in this catalogue is for descriptive purposes only. It should not be construed in any case as a guaranteed representation of the product properties in the sense of the law.

ARGO-HYTOS a. s. CZ - 543 15 Vrchlabí
Tel.: +420-499-403111, Fax: +420-499-403421
E-mail: sales.cz@argo-hytos.com
www.argo-hytos.com